

## Overview

The TR series embedded open frame touch monitors with multi-point (10 points) projected capacitive (PCAP) touch screen deliver an industrial-grade & reliable solution with wide-angle viewing, outstanding image clarity & accurate touch response that is cost-effective for OEMs and systems integrators. Embedded eye-catching & rugged bezel with edge-to-edge glass and ultra-thin & ultra-narrow edge structure design with patent delivers flat design self-service terminals with high durability and scratch & water resistance. Landscape, portrait and face-up orientation ensures flexible mounting possibilities in almost any installation. Our TR series product line is available in a wide range of sizes, offering the versatility needed for commercial kiosk applications from self-service and gaming to industrial automation, digital signage & healthcare.



## Features

### Embedded Design

Edge-to-edge glass design ensures seamless and flat integration

### Easy to Use

Plug & play, flexible video input interface

### Full HD

1920 x 1080 resolution

### Reliable and Professional Design

Elegant design with metal structure & plastic front bezel delivers outstanding image clarity

### Touch Through Enabled with PCAP

Accurate 10 points touch responses support touch through a front layer of glass with thickness's up to 5mm.

### Multi-touch

Support Windows multi-touch protocol

### Supported OS

Windows 7 /10, Android , Linux, Mac OS X

### Flexible Mounting

Different mounting holes & external brackets making flexible mounting possibilities in almost any installation

## Specifications

### Display

LED Panel	IPS-Panel ,43 inch
Backlight	E-LED (edge-lit)
Viewable Area	940.8 x 529.2mm
Brightness	450 cd/m2
Contrast Ratio	1000:1
Viewing Angle	178° H/V
Response Time	12 ms (GTG)
Number of Colors	16.7M Colors
Native Resolution	1920x1080 (16:9), FHD
Video Frequency	60Hz
Video Interface	VGA x1 / HDMI x1 / DVI x1
Input Resolution	1920 x 1080 @ 60Hz

### Touch

Touch Points	10 (HID, only with supported OS)
Touch Technology	No touch version → WTM430TR-NT
Touch Method	Projective Capacitive (PCAP)
	Finger, glove (latex)
Glass Overlay	Active & passive stylus pen
	4mm tempered glass
Water Resistance	Optional AG / AR surface finish
	Support touch in water fog and light rain
Calibration	Little drops of water will not cause drift
Response Time	16ms
Report Rate	>100Hz
Touch Interface	USB (Type B) x1
Supported OS	Win 7 / 10 / Android / Linux / Mac

### OSD Function

OSD Controls	7 buttons / remote control
OSD Languages	CN, EN, FR, IT, DE
	ES, KR, RU, PT
Remote Control Interface	RS232 x 1, support duplex communication remote Control (optional)

### Mechanical

Product Dimension	1041.7x 629.7x 48.1 mm
Packing Dimension	1132x 776.7x200 mm (1 PCS)
	1150x 910x 925 mm (10 PCS)
Weight(approx.)	26 kg / 30 kg(1PCS)/ 280 kg(10PCS)
Wall Mount Method	VESA,MIS-F,200x300 mm,Y,6,90

### Electrical

Internal Speakers	Support 8Ω 7W
Power Supply	AC in: 100V~240V (50/60Hz)
Typical Power	≤ 55W (typ.)
Standby Power	≤ 2 W (typ.)

### Environmental

Operating T & H	0 °C ~ 50 °C, 90% RH
Storage T & H	-20 °C ~ 60 °C, 90% RH

### Accessories

Active Stylus Pen	Included
Mounting Bracket	Wall mount or free standing
OPS PC	Supported

### Other

Ready for Use	7/24
Warranty	1 Year
Regulations	CCC, CE, FCC, CB, RoHS

## JEA Technologies Pty

Address: Unit 36, 41-49 Norcal Road, Nunawading, Victoria, 3131, Australia



Email: [sales@jeatech.com.au](mailto:sales@jeatech.com.au)

Tel: +61 (0) 3 8736 0330



JEA Technologies Pty is authorized distributor of AnyTouch.



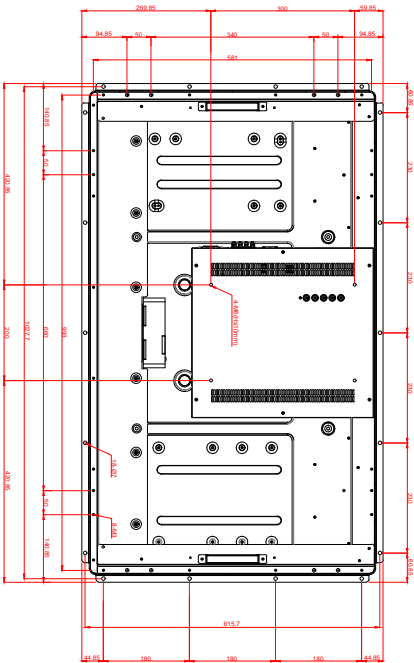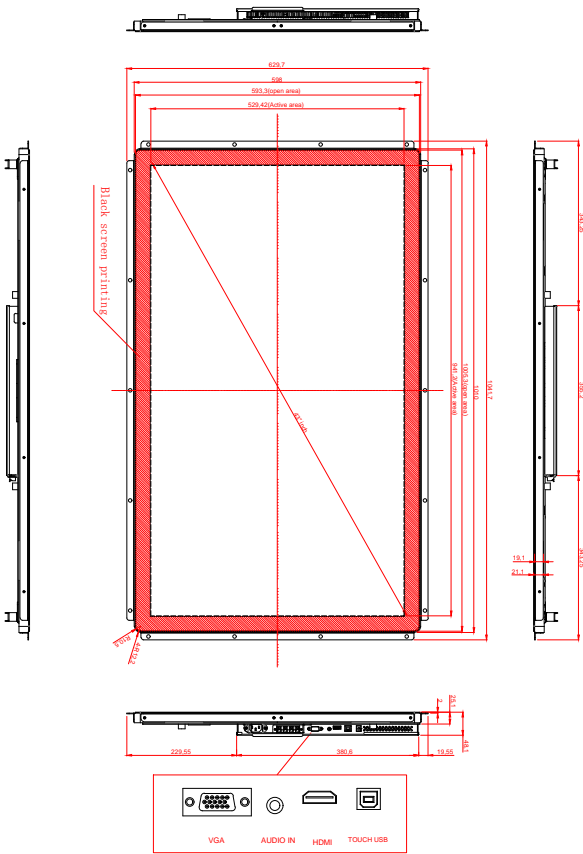

Tolerance Table	
Dimension Range	Tolerance (mm)
Under 25 mm	0.1
25.1-100mm	0.2
100.1-250 mm	0.4
250.1-400mm	0.8
400.1-500mm	1.5
500.1-630mm	2.0
630.1-800mm	2.5

TOLERANCING	
x±0.2	RADIOS±0.15
.xx ±0.1	ANGLES ±0.5°
Rev	Date
By	
DO NOT SCALE DRAWING	
图号:	
设计:	
日期: 2020.04.11	
Scale: NTS	
Page: 1 of 1	
Ver: 01	
THIRD ANGLE VIEW	